



PRORELSIC OVERVIEW

Aperçu PRORELSIC

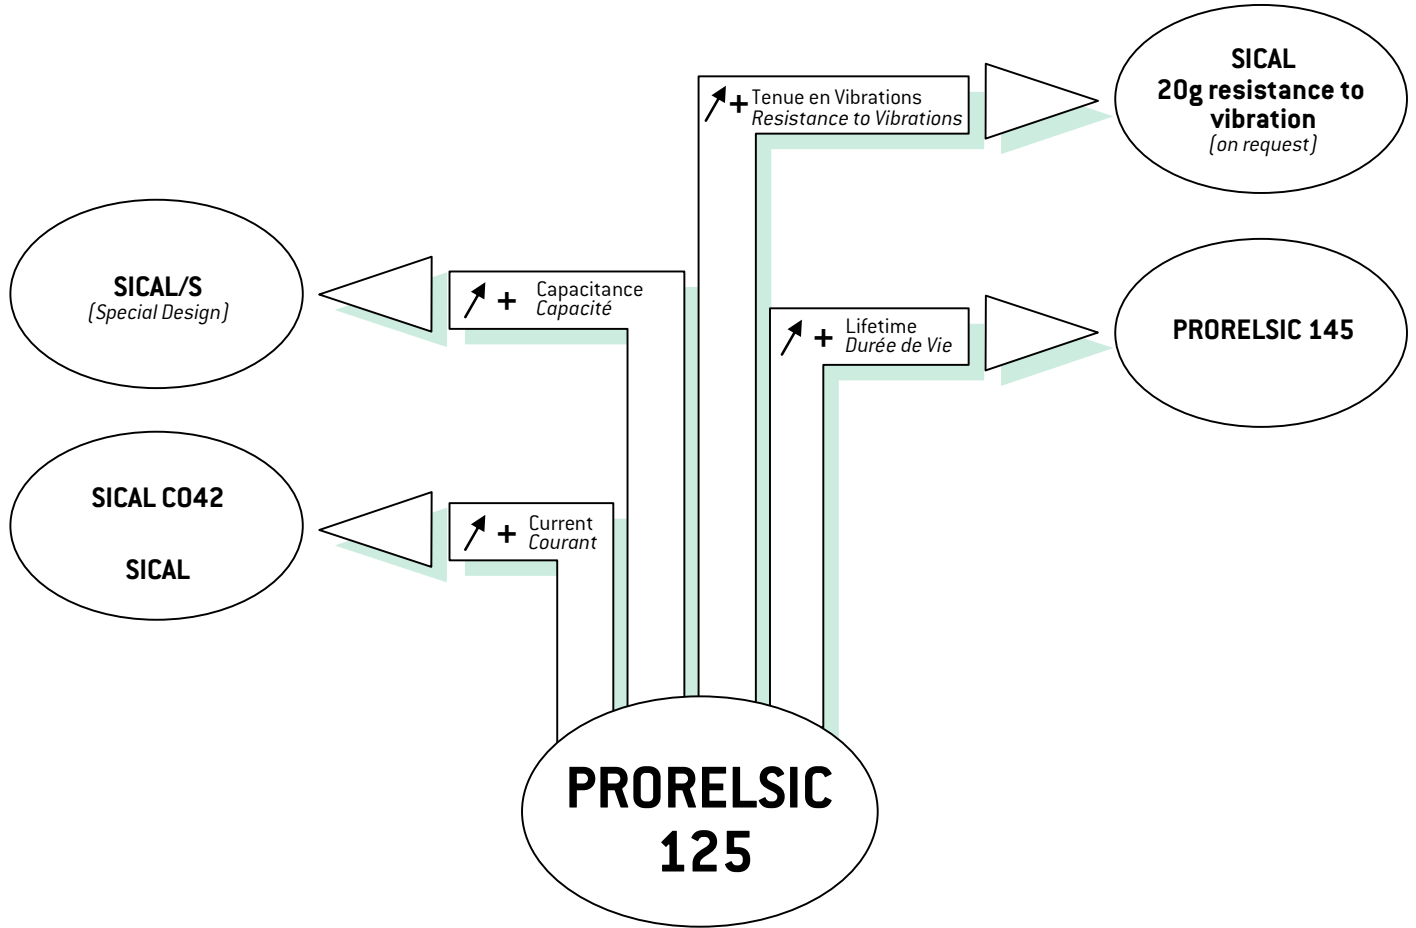

	85°C	125°C	145°C
STANDARD	SICAL/C042 10...630V ±20% / -10+50%	PRORELSIC 125 10...450V -10+50%	PRORELSIC 145 16...450V -10+50%
Maintenance	C031/C033 6,3...350V ±20%		