



IGBT Module-Dual

800A, 600V

PDMB800E6

□ 回路図 : CIRCUIT

□ 外形寸法図 : OUTLINE DRAWING

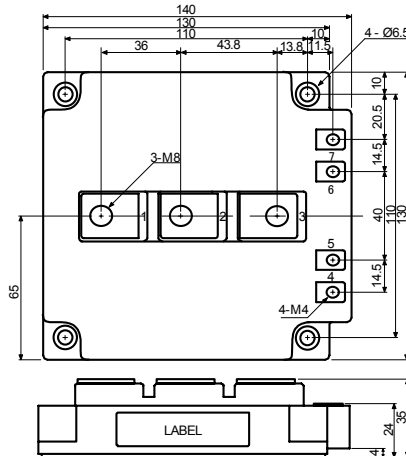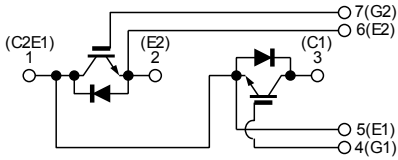

Dimension: [mm]

□ 最大定格 : MAXIMUM RATINGS (T_c = 25°C)

Item	Symbol	Rated Value	Unit
コレクタ・エミッタ間電圧 Collector-Emmitter Voltage	V _{CEs}	600	V
ゲート・エミッタ間電圧 Gate-Emmitter Voltage	V _{GEs}	±20	V
コレクタ電流 Collector Current	DC	800	A
	1ms	1,600	
コレクタ損失 Collector Power Dissipation	P _c	2,700	W
接合温度 Junction Temperature Range	T _j	-40~+150	°C
保存温度 Storage Temperature Range	T _{stg}	-40~+125	°C
絶縁耐圧(Terminal to Base AC, 1minute) Isolation Voltage	V _{ISO}	2,500	V _(RMS)
締め付けトルク Mounting Torque	Module Base to Heatsink Busbar to Terminals	F _{tor}	3 (30.6)
		M4	1.4 (14.3)
		M8	10.5 (107)

□ 電気的特性 : ELECTRICAL CHARACTERISTICS (T_c = 25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit	
コレクタ遮断電流 Collector-Emmitter Cut-Off Current	I _{CEs}	V _{CE} = 800V, V _{GE} = 0V	-	-	1.0	mA	
ゲート漏れ電流 Gate-Emmitter Leakage Current	I _{GES}	V _{GE} = ±20V, V _{CE} = 0V	-	-	1.0	μA	
コレクタ・エミッタ間飽和電圧 Collector-Emmitter Saturation Voltage	V _{CE(sat)}	I _c = 800A, V _{GE} = 15V	-	2.1	2.6	V	
ゲートしきい値電圧 Gate-Emmitter Threshold Voltage	V _{GE(th)}	V _{CE} = 5V, I _c = 800mA	4.0	-	8.0	V	
入力容量 Input Capacitance	C _{ies}	V _{CE} = 10V, V _{GE} = 0V, f= 1MHz	-	40,000	-	pF	
スイッチング時間 Switching Time	上昇時間 Rise Time	V _{CC} = 300V R _L = 0.375Ω R _c = 1.5Ω V _{GE} = ±15V	t _r	-	0.15	0.35	μs
	ターンオン時間 Turn-on Time		t _{on}	-	0.30	0.85	
	下降時間 Fall Time		t _f	-	0.10	0.25	
	ターンオフ時間 Turn-off Time		t _{off}	-	0.40	0.80	

□ フリーホイールダイオードの特性 : FREE WHEELING DIODE RATINGS & CHARACTERISTICS (T_c = 25°C)







Item	Symbol	Rated Value	Unit
順電流 Forward Current	DC	800	A
	1ms	1,600	

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
順電圧 Peak Forward Voltage	V _F	I _F = 800A, V _{GE} = 0V	-	1.9	2.4	V
逆回復時間 Reverse Recovery Time	t _{rr}	I _F = 800A, V _{GE} = -10V di/dt= 1600A/μs	-	0.15	0.25	μs

□ 熱的特性 : THERMAL CHARACTERISTICS

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit	
熱抵抗 Thermal Impedance	IGBT	Junction to Case (T _c 測定点チップ直下)	R _{th(j-c)}	-	-	0.045	°C/W
	Diode		-	-	0.110		

PDMB800E6

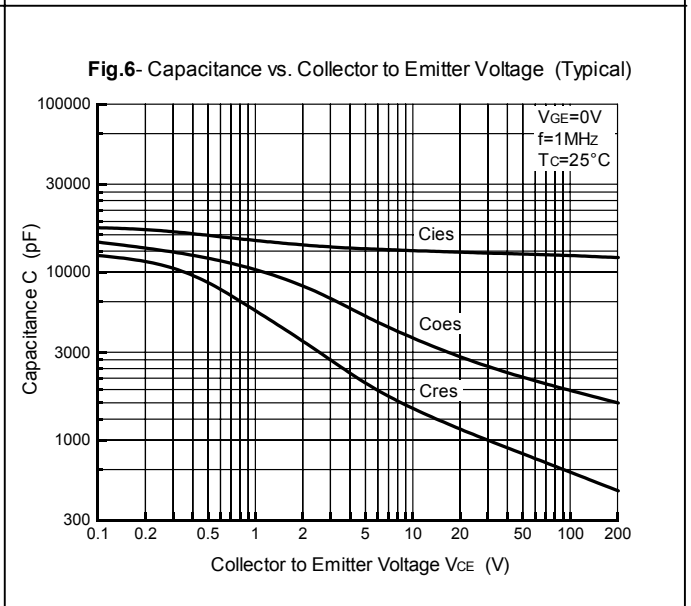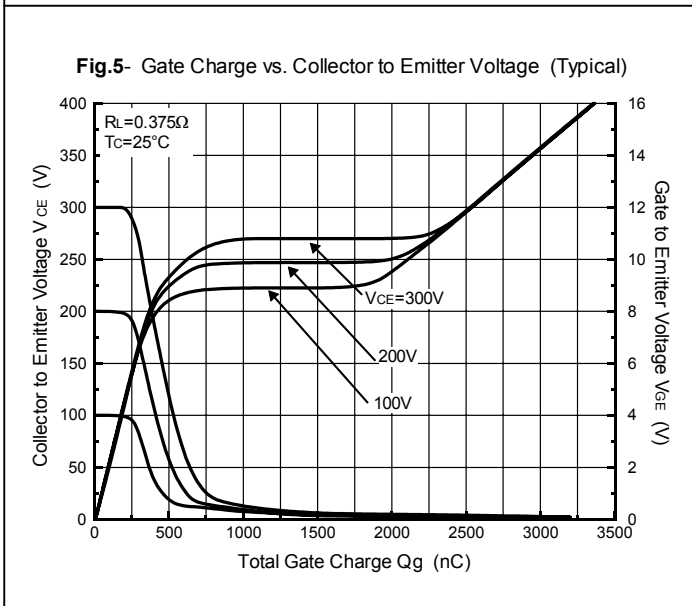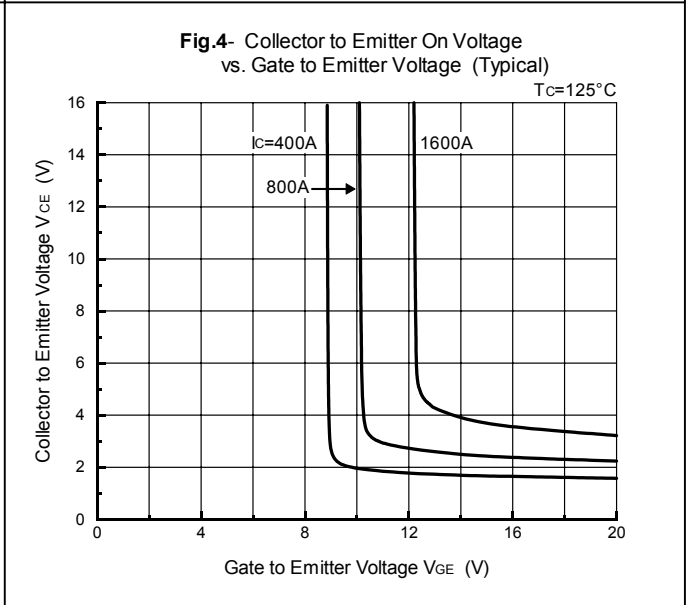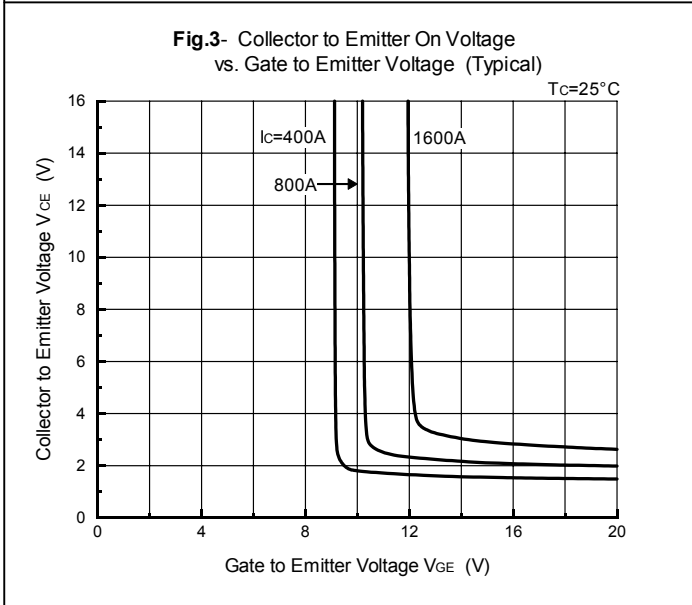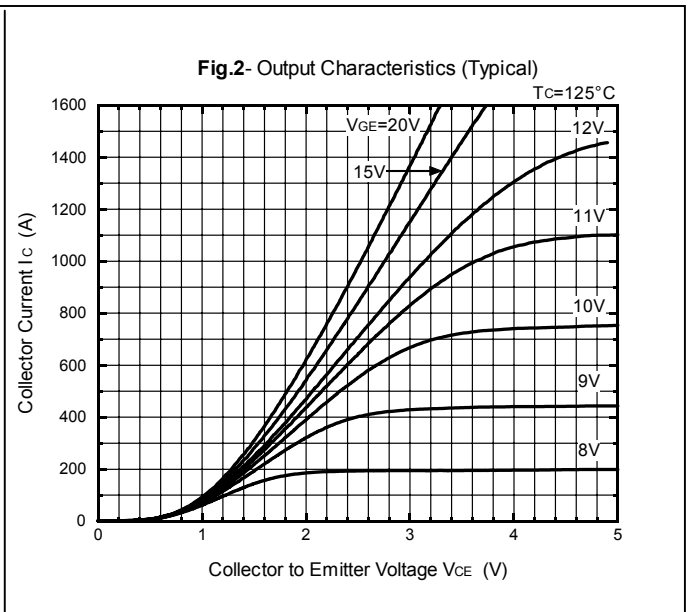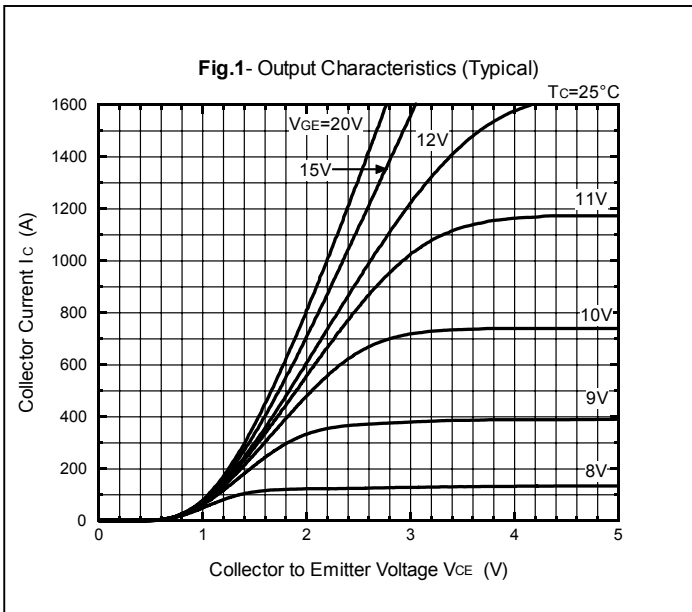

PDMB800E6

Fig.7- Collector Current vs. Switching Time (Typical)

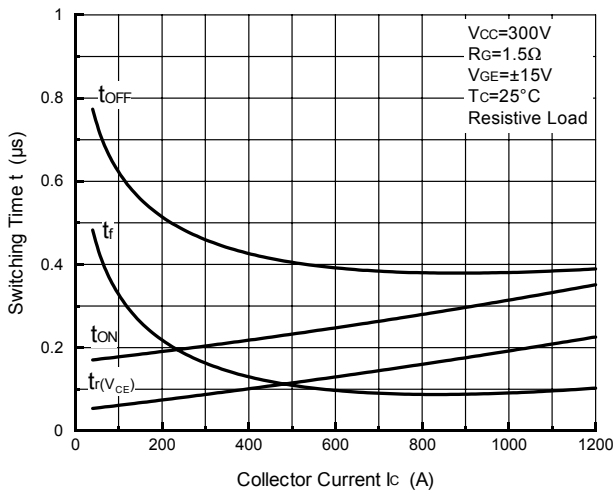


Fig.8- Series Gate Impedance vs. Switching Time (Typical)

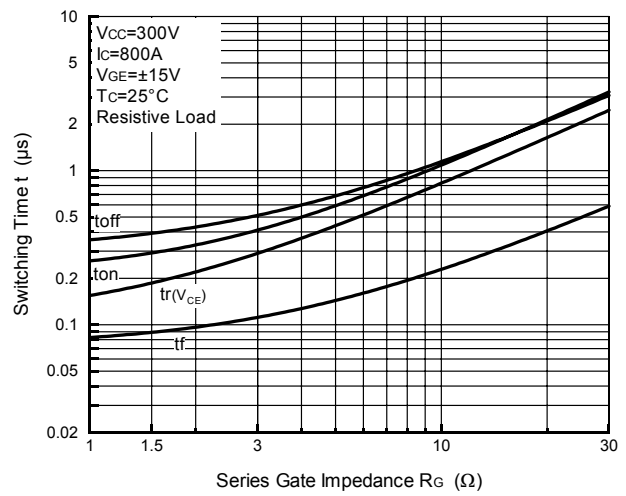


Fig.9- Collector Current vs. Switching Time

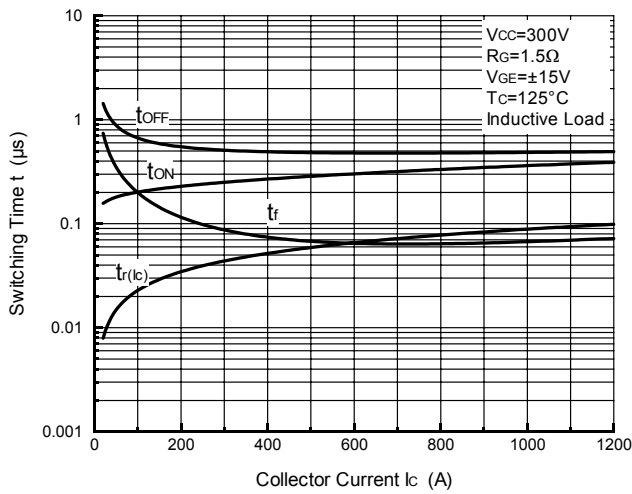


Fig.10- Series Gate Impedance vs. Switching Time

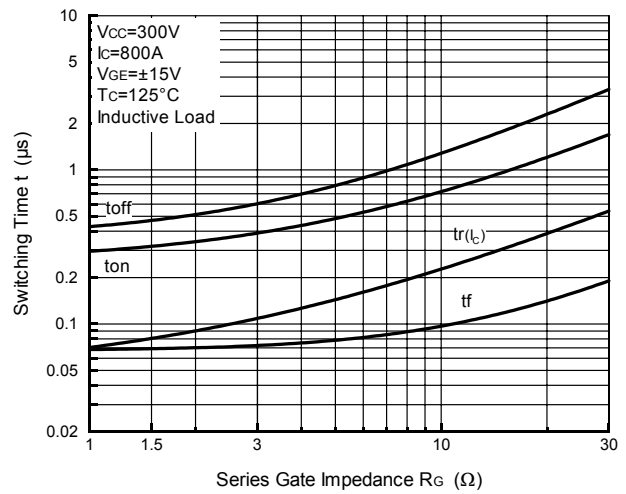


Fig.11- Collector Current vs. Switching Loss


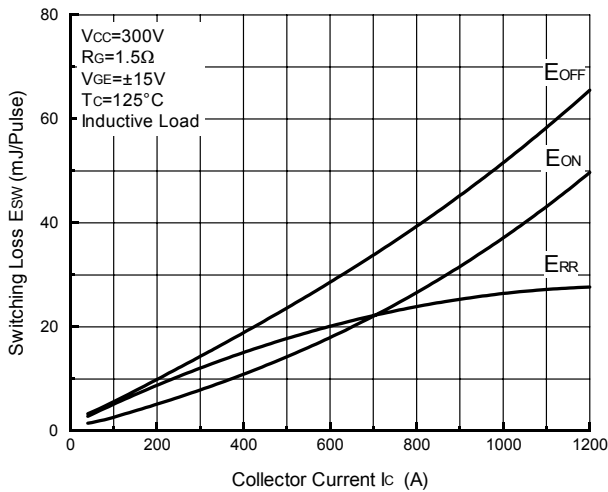


Fig.12- Series Gate Impedance vs. Switching Loss



PDMB800E6

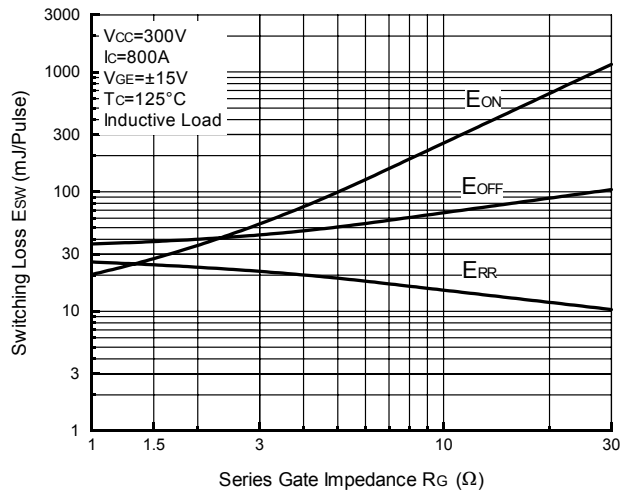